

Assembly Instructions

Model:	JT (Gladiator)
Description:	Subwoofer Install
Part Number:	MBQJT-SUBA-1 & MBQJT-SUB-1
Assembly Time:	120 Minutes (2 Hours)

Before you begin, read through these instructions and check that all parts are present. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

MBQJT-SUB-1 Parts List		
No.	Component Name	Qty
1	Subwoofer Enclosure	1
2	Subwoofer	2
3	Extension Harness	2

MBQJT-SUBA-1 Parts List		
No.	Component Name	Qty
1	Subwoofer Enclosure	1
2	Subwoofer	2
3	Extension Harness	2
4	NA2-400.1	1

1	10mm Socket
2	Ratchet
3	T20 Torx Bit

Disassembly

- Remove (4)10mm bolts securing the under seat storage compartment

May need to remove rubber insert to gain access to bolts



- Remove jack



Subwoofer Installation

- Cut a small hole in the carpet (as pictured) to pass the subwoofer extension harness through going toward the outside of vehicle along door seal toward the passenger seat area.



- Install jack



- Connect subwoofer enclosure wiring to subwoofer extension harness.




Subwoofer Installation

- Reusing the (4) 10 mm bolts holding the storage compartment, secure the subwoofer enclosure



- Connect the subwoofer speaker wires to the subwoofer and repeat the process for other subwoofer

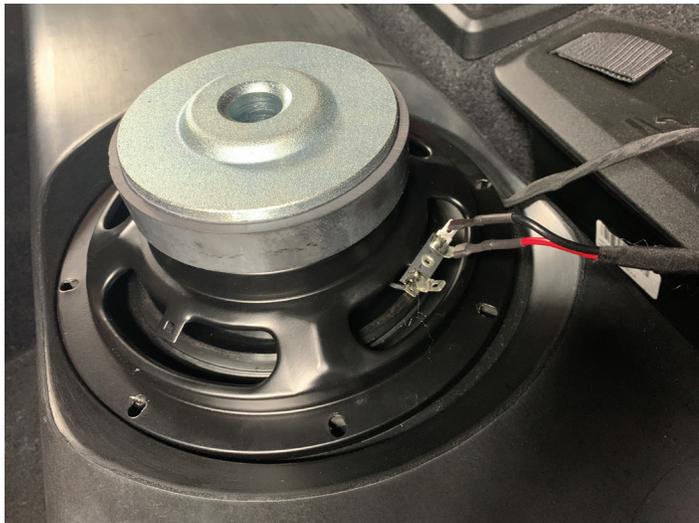

- Secure the subwoofer to the enclosure with (8) High-Low screws using a T-20 Torx bit



FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.